



Installation Instructions for the Fingershield Push-Side Door Hinge Guard


No.36 HSS Wire gauge drill bit is required for attaching the hinge guard to metal doors and door-frames and any door type with a kick-plate.




1. With the door fully closed, use a pencil/pen to draw a guideline from top to bottom on the door-frame using the 13/16" measuring block provided.




2. Repeat the procedure on the door to produce a second guideline.

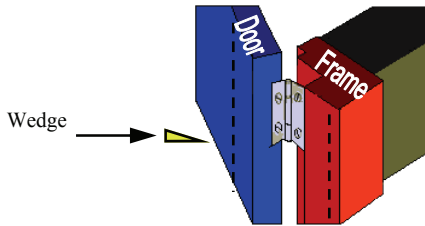

3. Now wedge the door fully open.



4. Remove the protective coating from the tape at each side of the hinge guard.




5. Line up the edge of the hinge guard parallel to the guideline on the door-frame and press firmly from the center of the door to hold in position.

For wooden and uPVC door frames:

Secure with the screws provided working from the center outwards.

For metal door frames:

Using the pre-drilled screw holes in the hinge guard as a guide, pre-drill the door frame with the No. 36 HSS Wire gauge drill bit then secure with the screws provided.

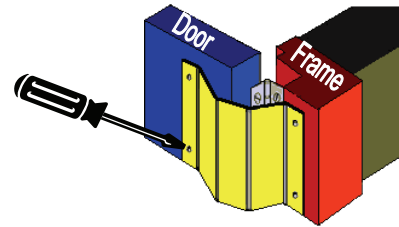

6. Repeat the procedure to attach the hinge guard to the door.

N.B. To shorten a guard cut at the required length with a pair of strong scissors or snips.

The short hinge guard pictured here is for illustration purposes only. The actual door hinge guard should always be installed as close to the bottom of the door and door-frame to as high on the door and door-frame as the full length allows.

Maintenance and User Guidelines

Maintenance : All door hinge guards should be inspected periodically to ensure that they have not split or cracked and that they remain securely installed. If a hinge guard is found to be split or cracked it should be replaced immediately. To clean the hinge guard requires an occasional wipe over with a clean damp cloth, do not use solvents.

User Guidelines: For door/hinge maintenance, remove the screws from either the door or door-frame side of the hinge guard. When maintenance is complete, refit the hinge guard as shown in the Installation Instructions. For door replacement, remove all screws on the door side, and refit to new door as in the Installation Instructions. In buildings where trolleys, wheelchairs and mobile stretchers are used, staff must be cautioned to avoid striking the hinge guard. This can lead to damage and eventual failure. Constant kicking or striking of the hinge guard can cause it to split or be dislodged from its position. PLEASE BE ADVISED FINGERSHIELD SAFETY (USA), INC. CANNOT BE HELD RESPONSIBLE FOR ANY DAMAGE CAUSED AS A RESULT OF MISUSE.

CUSTOMER HELPLINE: 1-866-577-9221 (toll free)